


## HIGH TEMPERATURE HOSE - PRESSURE WASHER APPLICATIONS

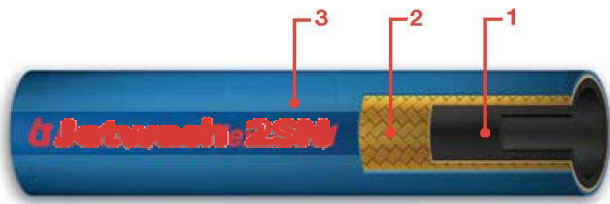

### A. Construction

- 1 - Synthetic rubber tube
- 2 - Two high tensile steel wire braids
- 3 - Blue non marking synthetic rubber cover

### B. Application

Heavy duty use on hot and cold water and detergent fluids  
High pressure cleaning equipment

### C. Temperature range

-C40 to 150C (-40F to 300f)


Increased operating temperatures will reduce assembly life

HOSE TYPE	Ø HOSE			REINFORCEMENT DIAMETER		OUTSIDE DIAMETER		WORKING PRESSURE		BURST PRESSURE		BEND RADIUS		WEIGHT	
	DN	INCH	SIZE	(MM)	(IN)	(MM)	(IN)	(BAR)	(PSI)	(BAR)	(PSI)	(MM)	(IN)	(KG/M)	(LB/FT)
	6	1/4"	4	12.7	0.689	15.7		400	5710	1600	23200	100		0.37	
	8	5/16"	5	14.3	0.799	16.4		400	5710	1400	20300	115		0.45	
	10	3/8"	6	16.7	0.937	19.4		400	5710	1320	19140	130		0.51	
	12	1/2"	8	19.8	1.110	23.1		400	5710	1100	15960	180		0.63	

SIZE		PRICE PER MT
1/4"	2SN / R2AT	P.O.A
3/8"	2SN / R2AT	7.63
1/2"	2SN / R2AT	9.15

ABOVE PRICES INDICATIVE ONLY - NETT PRICES QUOTED ON ALL HYDRAULIC HOSE

### COMPATIBILITY CHART BETWEEN THIS HOSE AND FITTINGS

JETWASH 2SN	-04	-05	-06	-08	-10	-12	-16	-20	-24	-32
	EXT-SKIVE: B INSERT + 3H131 FERRULE									