


MEETS OR EXCEEDS EN 855 R7 AND SAE 100 R7

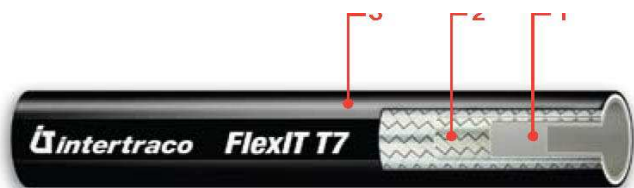

A. Construction

- 1 - Thermoplastic polyester tube
- 2 - Two polyester wire braids
- 3 - Black polyurethane cover

B. Application

Hydraulic oils, both mineral and biological
Polyglycol base oils, water / oil emulsions and water:

C. Temperature range


Hydraulic oils: -40°C to +100°C (-40°F to +212°F)
occasional peaks up to +125°C (+250°F)
Polyglycol base oils, water-oil emulsions and water:
up to +65°C (+149°F)

HOSE TYPE	Ø HOSE			REINFORCEMENT DIAMETER		OUTSIDE DIAMETER		WORKING PRESSURE		BURST PRESSURE		BEND RADIUS		WEIGHT	
	DN	INCH	SIZE	(MM)	(IN)	(MM)	(IN)	(BAR)	(PSI)	(BAR)	(PSI)	(MM)	(IN)	(KG/M)	(KG/M)
0R7-4	6	1/4"	4	6.4	0.250	12.2	0.480	210	3000	840	12000	100	4.0	0.10	0.19
0R7-5	8	5/16"	5	7.9	0.310	14.4	0.570	175	2500	700	10000	115	4.5	0.13	0.25
0R7-6	10	3/8"	6	9.5	0.380	15.9	0.630	155	2250	620	9000	125	5.0	0.15	0.29
0R7-8	12	1/2"	8	12.7	0.500	20.3	0.800	140	2000	560	8000	175	7.0	0.22	0.43

SIZE		PRICE PER MT	
		SINGLE	TWIN
1/4"	R7	6.38	16.70
5/16"	R7	8.50	18.93
3/8"	R7	9.70	23.43
1/2"	R7	13.57	29.79

ABOVE PRICES INDICATIVE ONLY - NETT PRICES QUOTED ON ALL HYDRAULIC HOSE

COMPATIBILITY CHART BETWEEN THIS HOSE AND FITTINGS

R7	-04	-05	-06	-08	-10	-12	-16	-20	-24	-32
	NO- SKIVE: B INSERT + A2R7 FERRULE									