


SWAGING EQUIPMENT

H25 mini

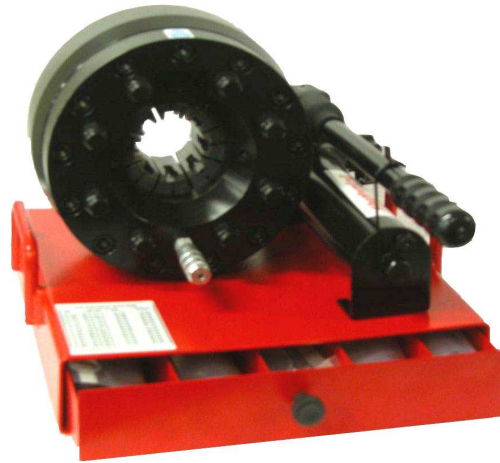

Product Specification

Capacity: R1AT & R2AT

1/4" - 1" (2 wire)

Horizontal head with easy slide in die location

Double elbows - 90 degree fittings possible

Standard die sets supplied - 5 die sets

Calibration - Hydralok direct dial micrometer adjustment

Operation by twin speed hand pump with integral relief valve

Pump Rating 630 Bar (9,000 psi)

Additional die sets available for 1 piece fittings, Freon, PTFE & other applications

Optional Air/Hydraulic foot pump to replace hand pump 5.5 - 7 Bar input (80-100 psi)