


## HIGH TEMPERATURE HOSE - PRESSURE WASHER APPLICATIONS

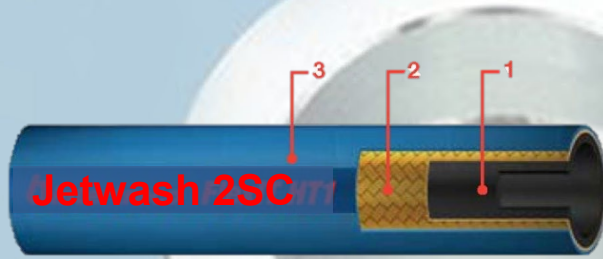

### A. Construction

- 1 - Synthetic rubber tube
- 2 - Two high tensile steel wire braids
- 3 - Blue non marking synthetic rubber cover

### B. Application

Heavy duty use on hot and cold water and detergent fluids  
High pressure cleaning equipment

### C. Temperature range

-C40 to 150C (-40F to 300F)  
Increased operating temperatures will reduce assembly life

HOSE TYPE	Ø HOSE			REINFORCEMENT DIAMETER		OUTSIDE DIAMETER		WORKING PRESSURE		BURST PRESSURE		BEND RADIUS		WEIGHT	
	DN	INCH	SIZE	(MM)	(IN)	(MM)	(IN)	(BAR)	(PSI)	(BAR)	(PSI)	(MM)	(IN)	(KG/M)	(LB/FT)
OECJW	6	1/4"	4	11.3	0.445	13.4	0.528	400	5800	1600	23200	75	2.95	0.29	0.19
OECJW	8	5/16"	5	12.9	0.508	15	0.591	400	5800	1600	23200	85	3.35	0.34	0.23
OECJW	10	3/8"	6	15	0.591	17.1	0.673	400	5800	1600	23200	90	3.54	0.42	0.28
OECJW	12	1/2"	8	18.6	0.732	20.7	0.815	400	5800	1600	23200	130	5.12	0.58	0.39

PRICES QUOTED ON REQUEST

### COMPATIBILITY CHART BETWEEN THIS HOSE AND FITTINGS

JETWASH 2SN	-04	-05	-06	-08	-10	-12	-16	-20	-24	-32
	NO-SKIVE: 2H131 FERRULE									
	EXT-SKIVE: 3H131-S FERRULE									