


# QUICK RELEASE COUPLINGS

## HS SCREW TYPE COUPLINGS

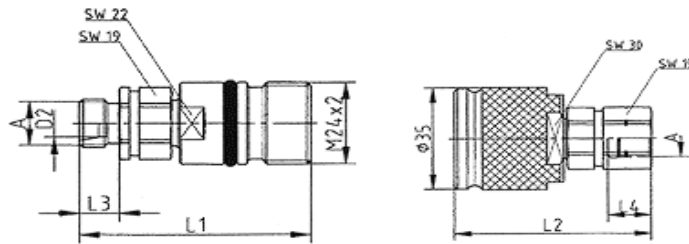


Screw type couplings of the HS series are coupled by simply screwing the carrier and probe halves together until the thread contacts the limit stop. They are particularly suited for heavy duty service conditions in construction machinery.

Working pressure : 400 bar

**PRICES AVAILABLE ON REQUEST**

## RS SCREW TYPE COUPLINGS

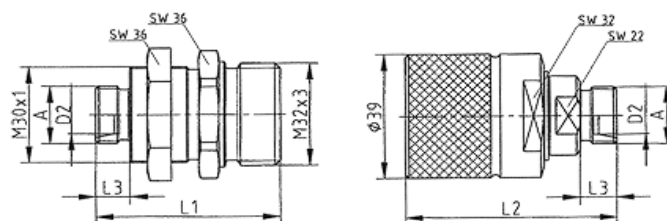

Screw type couplings of the HS series are coupled by simply screwing the carrier and probe halves together until the thread contacts the limit stop. They are designed for robust conditions and high pressure vibrations with high frequencies.

**PRICES AVAILABLE ON REQUEST**

PL 2022